

Need a temporary Road

SEE CANDIAN SUPPLIER POWER PLANT SUPPLY CO

http://www.powerplantsupplyco.com/products.php?prod_id=84



Easy to Deploy



Site Access



Protect Turf



No soft ground delays




Roll your Road back up when finished & take it to the next site.



SEE ALL CONTACT INFORMATION FOR POWER PLANT SUPPLY CO

<http://www.powerplantsupplyco.com/contacts.php>

www.powerplantsupplyco.com

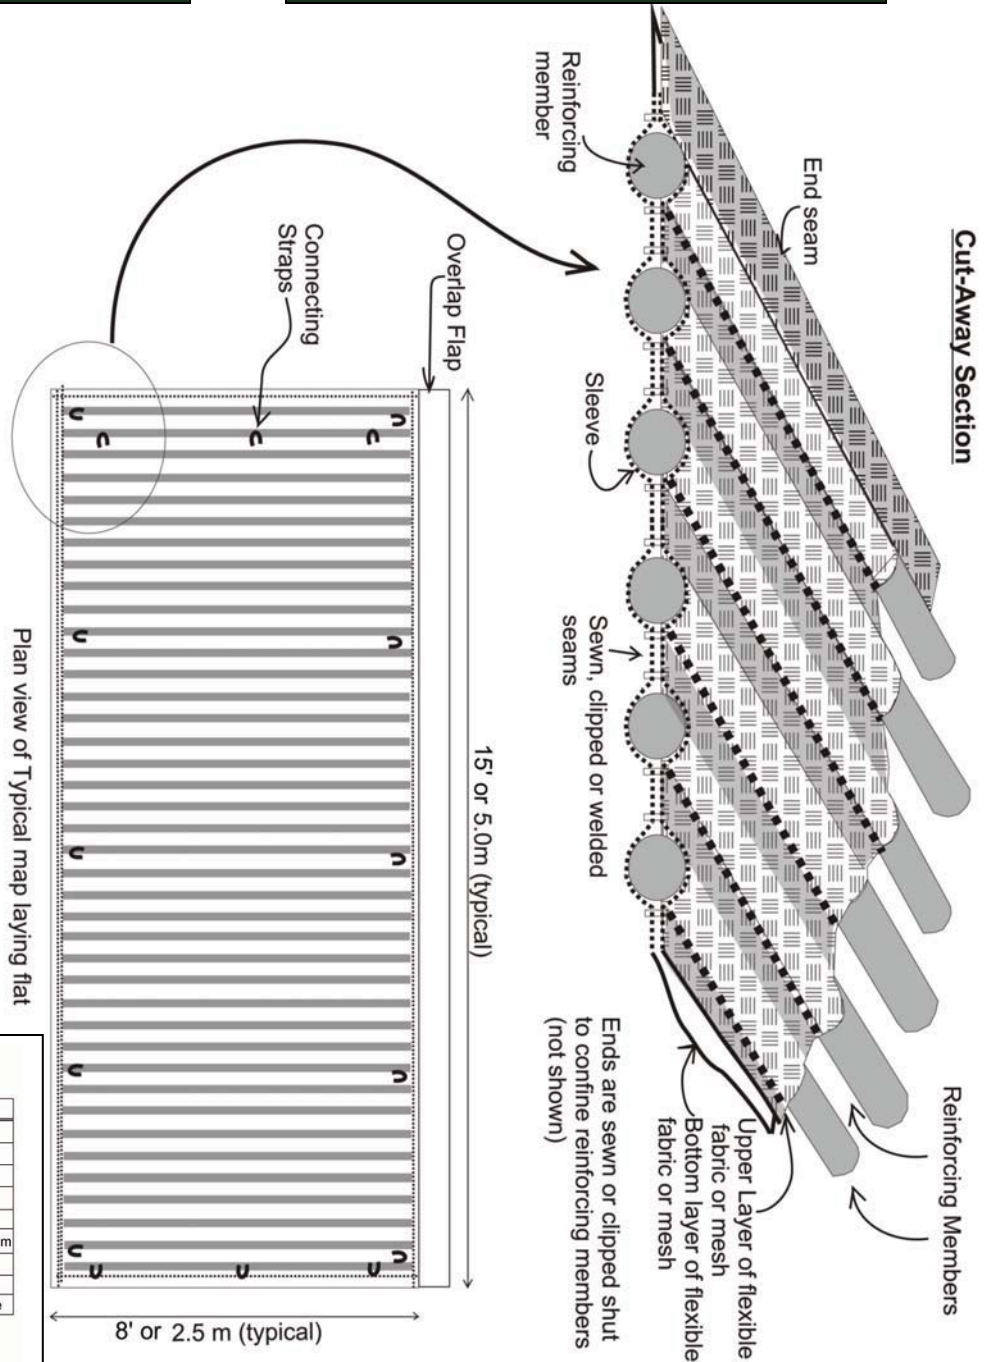

Plan view of Typical mat laying flat

PROPERTY	TEST PROCEDURE	VALUE
Grab Tensile Strength	ASTM D4632	802.6 lbs.
Apparent Breaking Elongation	ASTM D4632	25% / 18%
Trapezoid Tearing Strength	ASTM D4533	607 lbs.
Puncture Resistance	ASTM D4833	374.3 lbs.
Mullen Burst	ASTM D3786	456.88 psi
Apparent Opening Size	ASTM D4751	70 US Sieve / 0.212mm
Constant Head Permittivity	ASTM D4491	20.16 g/m/ft ²
Wide Width Tensile	ASTM D4595	685.7 lbs./in.
Material	Woven Geotextile	100% Polypropylene

APPROXIMATE DIMENSIONS PER MAT	
Size Deployed (approx.)	15' x 8'
Shipping Size (rolled)	1.5' dia. x 8.5' long and
Weight	75 - 90 lbs

5 - carabiner clips for each mat (Side connection and end connection straps)